


- ⚠ CONTACTS: COPPER ALLOY.
SHELL: COPPER ALLOY
HOUSING: UL 94V-0 RATED THERMOPLASTIC, COLOR: SEE TABLE.
- ⚠ CONTACTS: 0.076µm MINIMUM GOLD OVER
0.76µm MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80µm MINIMUM TIN-LEAD ON SOLDER TAILS
ALL OVER 1.27µm MINIMUM NICKEL.
SHELL: 5.10µm MINIMUM BRIGHT TIN.
- ⚠ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⚠ RECOMMENDED PC BOARD THICKNESS 1.57.
- ⚠ CONTACTS: 0.076µm MINIMUM GOLD OVER
0.76µm MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80µm MINIMUM TIN-LEAD ON SOLDER TAILS
ALL OVER 1.27µm MINIMUM NICKEL.
SHELL: 1.27µm MINIMUM NICKEL ALL OVER, MATTE TIN DIPPED ON TAILS.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

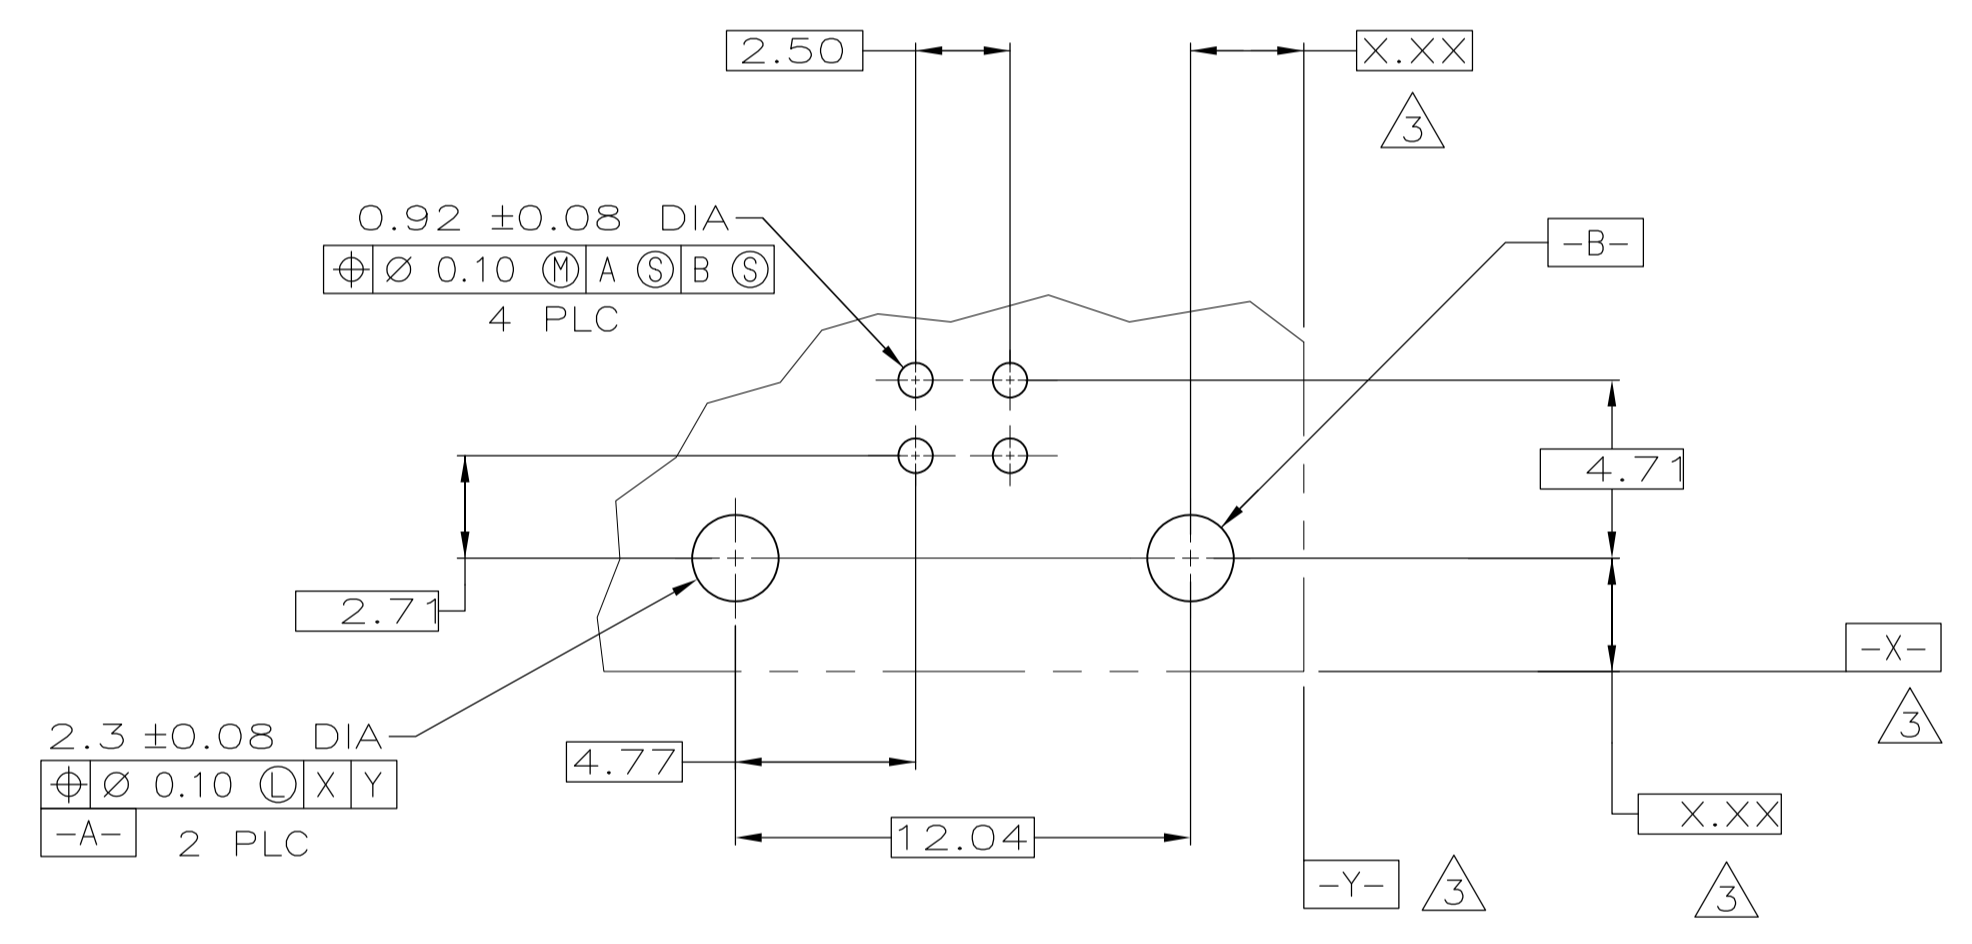

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

⚠ OBSOLETE	YES	⚠	BLACK	787924-4
	NO	⚠	BLACK	787924-3
⚠ OBSOLETE	YES	⚠	NATURAL	787924-2
	YES	⚠	BLACK	787924-1
HIGH TEMPERATURE COMPATIBLE		FINISH	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN D.BROCKWAY 25 OCT 96		TE Connectivity	
DIMENSIONS: mm		CIRK J.HAMPTON 14 NOV 96		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.HAMPTON 14 NOV 96		PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE	
1 PLC ± 0.10		WEIGHT		CAGE CODE	
2 PLC ± 0.10		A1		DRAWING NO	
3 PLC ± -		CUSTOMER DRAWING		RESTRICTED TO	
4 PLC ± -		SCALE 5:1		SHEET 1 OF 1	
ANGLES ± -		REV H2			
FINISH SEE TABLE					