


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
 1.1 FREQUENCY RANGE: DC to 18.0 GHz
 1.2 VSWR: 1.25:1 MAX.
 1.3 IMPEDANCE: 50 OHMS
 1.4 POWER: 2 WATTS AVG. AT +25°C
 DERATED LINEARLY TO 0.5 WATTS AT +125°C
 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICRSECOND PULSE WIDTH).
 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN
 (REF.: INK-02611-27-18)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

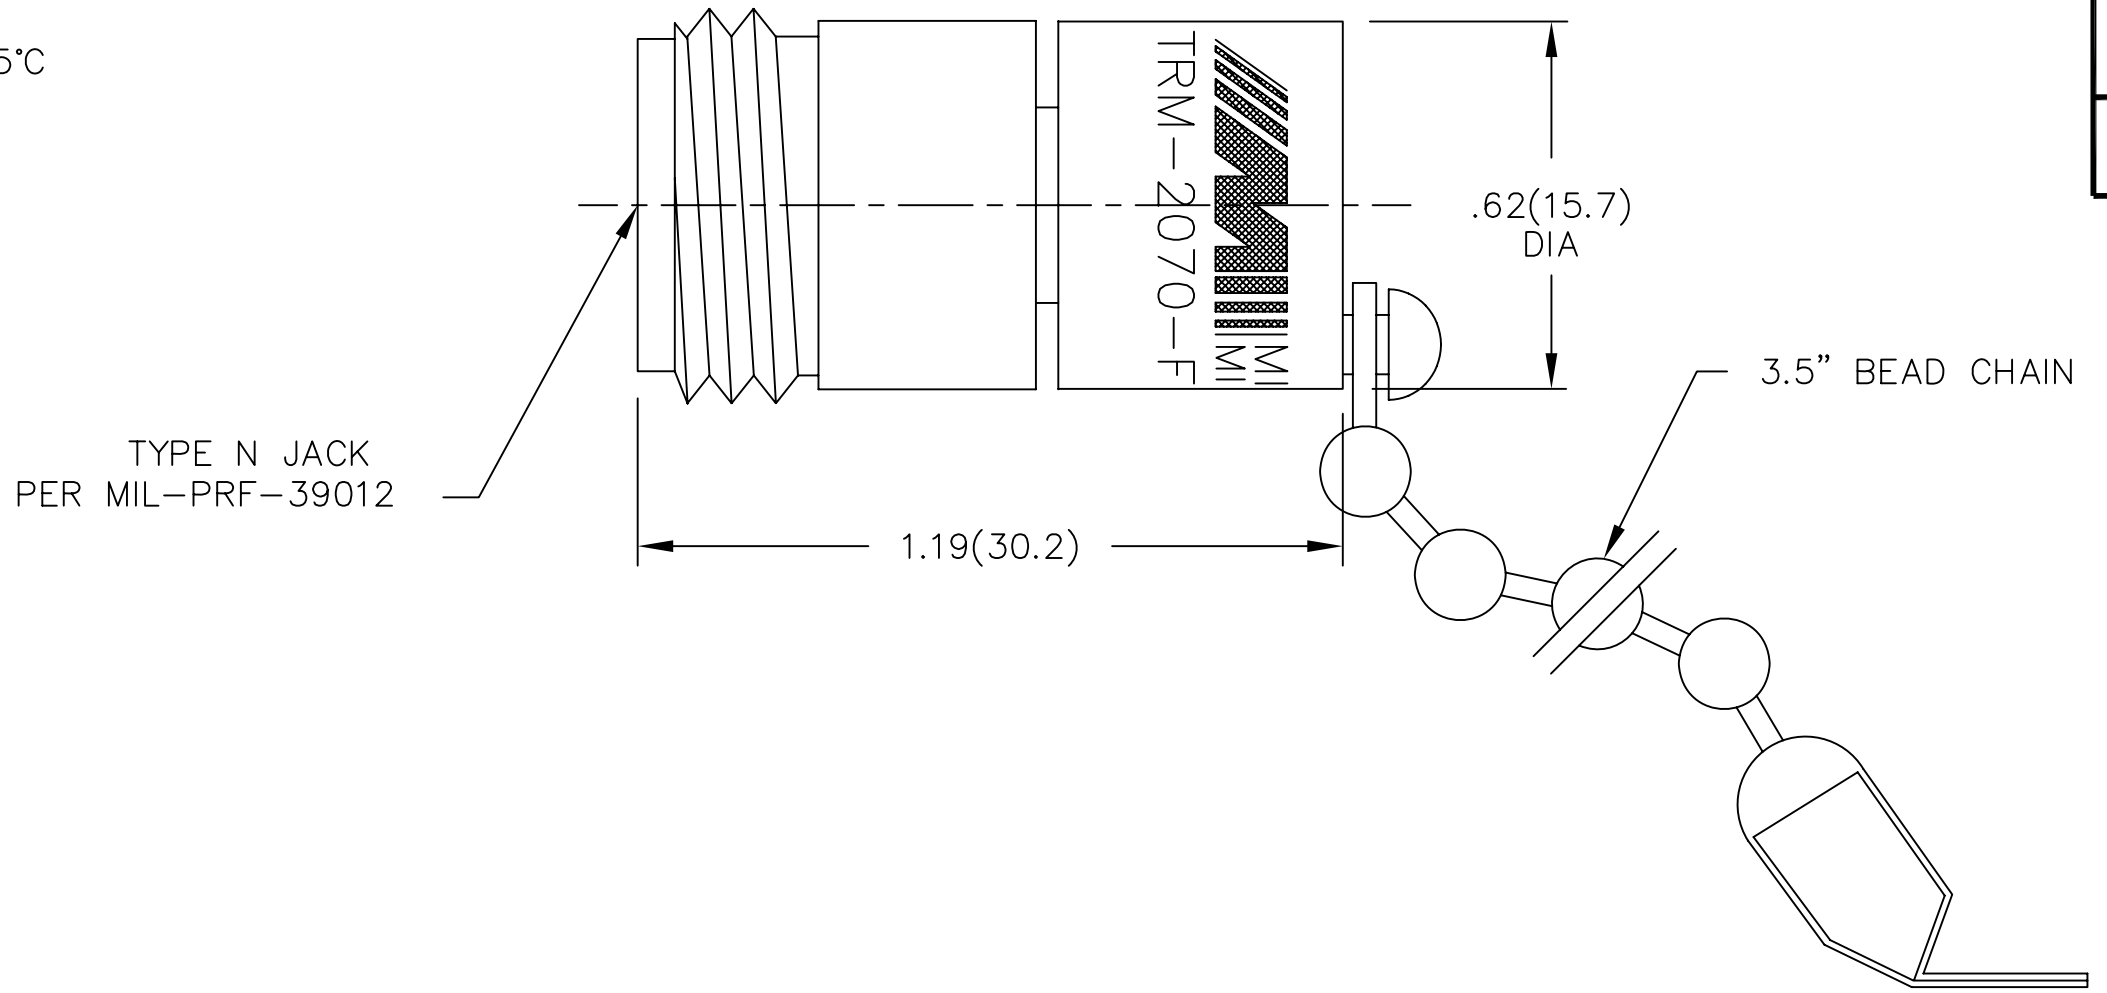

DWG NO. WAS: 05996-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	5/22/85
A	ECR 6545	8/1/89
B	ECR 7129	2/23/90
C	CAD/UPDTE SPCS. & MRKNG	8/4/93
C1	ADDED TITLEBLOCK	10/27/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. 34078	MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
	DRAWN/DATE A.BEATTY 8/4/93	ENG./DATE G.KOZAK 8/10/93	DRAWING NUMBER TRM-2070-FC-NNN-07	
	CHECKED/DATE M.HOLLMAN 8/6/93	APPROVED/DATE	SCALE: 3=1	SHEET 1 of 1