


Electrical Test:

1. 100% Test(Open ,short ,miss wire)
2. Contact Resistance:3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 300V DC/10ms

P/N	L (FT)	T (MM)	PE BAG
P580-015	15FT	30mm	10"13"*0.1 mm
P580-020	20FT	50mm	10"13"*0.1 mm
P580-025	25FT	60mm	10"13"*0.1 mm

Pin Assignment

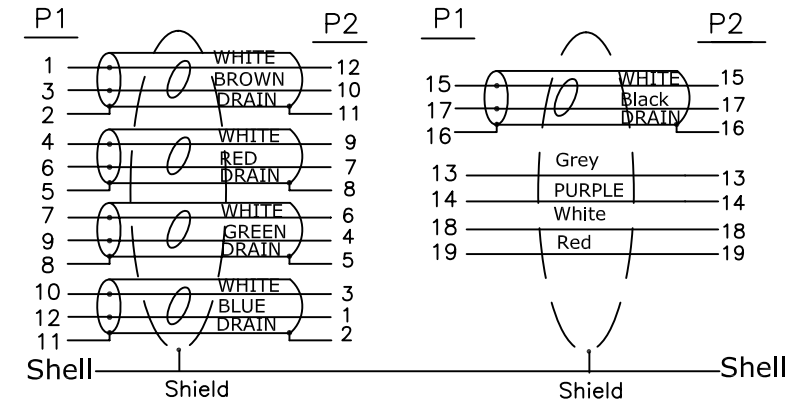

				TOLERANCE			Tripp Lite				
				INCHES		M/M					
7	DisplayPort M Transparent dust cover	2	pcs	.X	.015	.30	TITLE: Display Port M to M Cable				
6	Inside Molding:PE	4	g	.XX	.010	.10					
5	45P Black PVC	10	g	.XXX	.005	.05					
4	DisplayPort (DP01#) M Black ABS down Shell	2	pcs	DRAWN BY HELONGCHAO			CUSTOMER :		DRAWING NO. :		REV. A
3	DisplayPort M(DP01#) Black ABS UP Shell	2	pcs	CHECK BY			SCALE	NONE			
2	DisplayPort M Insulation:Black,Shell nickelplate	2	pcs	APPD BY			UNIT	MM	DATE 2014.05.02		1/1
1	Display Port UL20276 (28AWG*1P+EAM)*5C+28AWG*5C+AEB (B=16/5/0.12 50%AL) OD:7.3MM BLACK	L	m				DATE	2014.05.02			
NO	DESCRIPTION	Q' TY	UNIT								