





插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剥(Strip)	外剥(Roj)	顏色(Color)	H05VV-F 1.0mm ² /3C 黑色(Black) 線長: (Length) 3000 ^{+50.8} / _{-12.7}	外剥(Roj)	內剥(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
45P黑色 87A+2A Black	KE-88 (10A 250V-)	1	6±1	18±1	棕/Brown(L)		16±1	5 ⁺¹ / ₋₀	棕/Brown(L)	FM-5 (10A 250V-) (IEC 320 C13) 電腦電源線端子	45P黑色 87A+2A(Black)	1
黑色(Black)	大英式支架 (Brutain Plug Insert)	1	6±1	28±1	藍/Blue(N)		16±1	5 ⁺¹ / ₋₀	藍/Blue(N)	電腦電源線內模 (Computer power cord terminals) FM-5兩件式內模 (FM-5 Inner Body)	銅本色(Copper)	3
	10A保險絲 (10A Fuse)	1	6±1	38±1	綠注黃(E) Green/Yellow		16±1	5 ⁺¹ / ₋₀	綠注黃(E) Green/Yellow		白色(White)	1

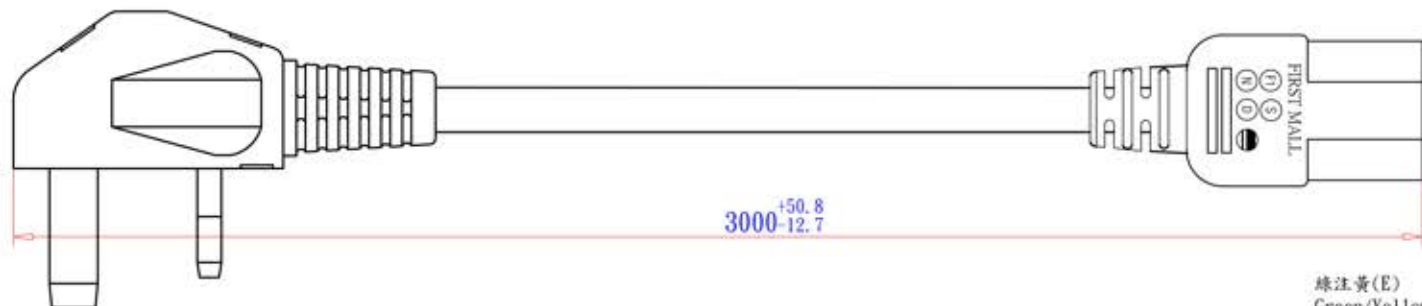

插頭端面圖
(Dimensions of Plug Face)

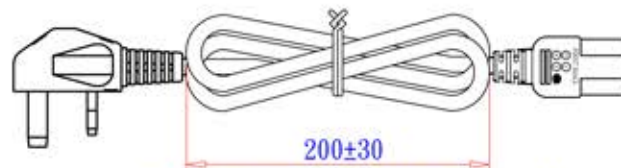

B-C3 扎線圖示 (B-C3 Hank Detail)

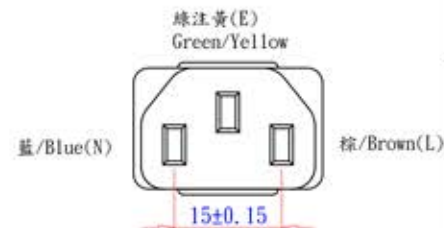


插頭端面圖
(Dimensions of Plug Face)

Insulation Thickness 0.60 mm
Overall Diameter 2.55±0.10 mm

Copper Conductor
32/0.20±0.008 mm
Resistance 19.5
(20°C Max), ohms/km

Jacket Thickness 0.80mm
Overall Diameter 7.1±0.20mm

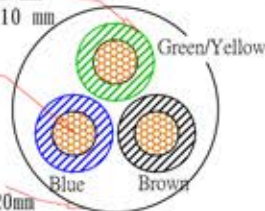

線材截面圖
(Wire Cross-Section)

包裝方式(Packing)

扎線方式 (Bulk Pack)	依繞線圖示繞線 See Hank Detail(B-C3)	
紙箱尺寸 (Carton Size)	480 X 320 X 250	
包裝數量 (Packing Q'ty) 標籤(Label)	PCS	
正側唛頭 (Carton Print)	依客户要求印刷 (See Purchase Order)	1. 高壓測試:2000V/1Sec <3mA (Hi-Pot Test:2000v/1Sec <3mA)
電線印字內容 Wire Printed	使用充實 線材 四印字 (Un-Filler, Gravure)	紙箱唛頭標碼 Shipping Mark

<VIDED> KEMA-KEUR IEMMEQU S E N D G H05VV-F
3X1.0mm² G TSA-3 1.0mm² NSW21631 CCC 60227 IEC 53(RVV) 300/500V
3X1.0mm² CCC 2003010105027526 GB5023.5-2008 WONDERFUL-DG -LF-

CnC

SIGNATURE	NAME	DATE			
APPROVED					
M.F.G. CHECKED			2012 00 0419	新版發行	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION	SYMBOL
DRAWN	楊承正	2012/04/19	PART No.	800-1.00-16H-BL-00300	
CUSTOMER			DWG No.		

CnC Tech, LLC

Industrial Cable and Connector Technology

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	